



GB/03/00069

INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8EQ

21 MAY 2003	
WIPO	PCT


**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED
BUT NOT IN COMPLIANCE WITH
ARTICLE 17(2) OF THE

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

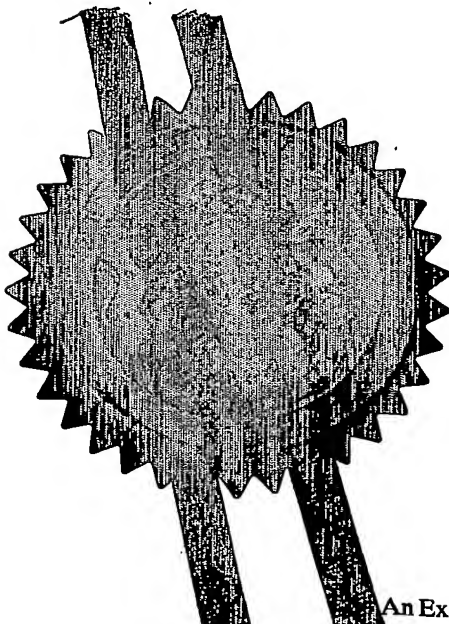

Signed

H. Behan

Dated


12 May 2003



16 JAN 02 08:29:33 D00107
PO 1/77 0.00-0200905/8

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

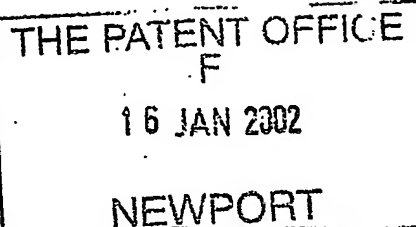

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

N02/0006/GB

2. Patent application number

(The Patent Office will fill in this part)

0200905.8

16 JAN 2000

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Reflec plc
Road One
Winsford Industrial Estate
Winsford
Cheshire CW7 3QQ

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

GB

4. Title of the invention

Retroreflective Materials

5. Name of your agent (if you have one)

McNeight & Lawrence

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Regent House
Heaton Lane
Stockport
Cheshire
SK4 1BS

Patents ADP number (if you know it)

0001115001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d).

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description

6

Claim(s)

Abstract

Drawing(s)

1

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

McNeight + Lawrence

14.01.02

12. Name and daytime telephone number of person to contact in the United Kingdom

A R Collingwood

0161 480 6394

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

RETROREFLECTIVE MATERIALS

This invention relates to retroreflective materials such as tapes and a method
5 for producing such materials with patterned areas and/or graphical and/or pictorial
information.

Retroreflective materials such as tapes are used to impart night conspicuity
to garments, and are required to be made to exacting standards.

10

Conventionally, such retroreflective materials are made by hemispherically
coating, e.g. metallising, a layer of microbeads while held on a web partly submerged in
a coating on the web and transferring the layer of coated beads, uncoated side facing
outwards, on to a substrate so that the non-coated or unmetallised areas of the beads are
15 then exposed. The coating or metallisation process results in the coating or metal covering
not only the beads but also extending across the gaps between the beads. A retroreflective
material made in this way is herein referred to a retroreflective material of the kind referred
to. Instead of coating by metallising, the coating may be a suitable material causing
retroreflection in the beads and may be in the form of a metal (e.g. aluminium) flake or
20 mica containing medium such as a paint or lacquer.

25

These materials are usually made to comply with the European EN471
standard. If it is required to apply printed matter, the problem of reduced retroreflectivity
arises since the printing medium will tend to reduce retroreflectivity.

The present invention seeks to provide retroreflective materials, especially
EN471 tapes, with graphical and/or pictorial matter and/or patterned areas without
deleteriously affecting retroreflectivity.

According to the present invention there is provided a retroreflective material of the kind referred to in which the coating (e.g. a metal) used to produce or enhance retroreflectivity and which bridges at least some of the gaps between the beads is treated and/or removed to produce areas of contrast.

5

In this way, by selective removal or treatment of the coating, the areas of contrast may be arranged to represent patterning and/or graphical and/or pictorial matter without significantly affecting the retroreflective properties of the beads, if at all.

10

Alternatively, the coating bridging substantially all of the gaps between the beads may be removed or treated to produce a material (e.g. tape) which is of a different colour to conventional silvery grey coloured tape.

The retroreflective material may be EN471 compliant.

15

The material may be a tape for sewing or otherwise attaching to a garment or other artefact. The material may, however, be sheet suitable for example as a garment panel.

20

The removal of the coating may expose the underlying substrate and, if desired, the substrate may be coloured (using a dye or pigment) or otherwise adapted to produce a desired effect.

25

Where the contrast is produced by treatment of the coating, such treatment may involve chemical treatment (e.g. attack) of the coating with or without a colourant to produce a coloured region.

According to another aspect of the invention there is provided a method of modifying the appearance of a retroreflective material of the kind referred to (e.g. by applying patterning and/or graphical and/or pictorial matter to the material) in which the coating (e.g. metal) used to produce or enhance retroreflectivity and which bridges at least some of the gaps between the beads is treated and/or removed to produce areas of contrast.

The areas of contrast may correspond to the desired patterning and/or graphical and/or pictorial matter.

Removal or treatment of the coating may be effected using a medium capable of being applied by a contact or non-contact printing technique and capable of dissolving or otherwise rendering the metal removable, e.g. by washing, or by changing the visual appearance, e.g. colour, of the coating.

The medium is typically selected to be one which does not attack the substrate in which the beads are embedded thereby preventing or reducing any tendency for the medium to attack the coating adhered to the embedded bead surfaces.

Instead of, or in addition to, removing the coating, it may be treated to render the treated areas visibly distinct from the coating adhered directly to the beads. Such treatment may result in the treated areas being visibly distinguishable from those areas from which coating has been removed.

The medium may be in the form of a liquid, paste-like or gel-like medium which can be applied by a printing technique in relatively well-defined areas without spreading. To this end, the medium may incorporate a thickening or viscosity enhancing agent to reduce its tendency to spread once printed on to the retroreflective material. Once the medium has had the desired effect, it may be washed off.

The medium may also include surface tension controlling or modifying agents to improve the quality of printing.

The medium may be alkaline.

5

The invention will now be described by way of example only with reference to the accompanying drawings, in which:

10

Figures 1a to 1c are diagrammatic views representing different stages during the production of a retroreflective tape of the kind referred to;

Figure 2a is an enlarged view corresponding to Figure 1c illustrating the presence of metal bridging the gaps between adjacent beads; and

15

Figure 2b is the counterpart of Figure 2a following removal of metal from the gaps.

Referring to Figures 1a to 1c, a retroreflective material in the form of a tape may be manufactured in the manner disclosed in International Patent Application No. WO 00/54079, the entire contents of which are incorporated herein by this reference. The production process involves forming a layer 13 of spherical glass beads 14 embedded into a melt adhesive 16 such as a linear low density polyethylene (LLDPE) carried by a web 15 which may be Kraft paper or a polyester film for example. The exposed surfaces of the beads 14 are then metallised, e.g. using aluminium, with the consequence that the coating 16 is also covered with aluminium at the gaps between adjacent beads 14. Typically, the microbeads used may be between 53 and 75 microns in diameter (200 - 270 US mesh size) and may have a refractive index close to 1.9 (e.g. 1.92 or 1.93). Flex-o-Lite ® TSTF (twice sieved, twice fired) have been found to be suitable beads.

A second adhesive film 32 such as a polyurethane film (e.g. a polyester-based polyurethane which optionally may contain a blocked isocyanate) carried by a sheet 33 (which may itself be a melt adhesive layer such as a thermoplastic co-polyamide, co-polyester or polyurethane) is then laminated to the metalised layer 13 of beads (see Figure 1b) and is used to strip the layer of beads from the coating 16 to produce the product shown in Figure 1c. This product comprises a substrate comprising melt adhesive layer 32 in which the beads 14 are embedded with their unmetallised surfaces exposed. At this stage, it will be noted that the metal bridging the gaps between the beads has now been transferred to the substrate formed by melt adhesive layer 32. Depending on the size distribution of the beads and the bead scattering process, the areas between the beads may typically be of the order of 10% of the total cross-sectional area of the beads.

Printing of the resulting retroreflective material is effected in accordance with the present invention by treating and/or removing the aluminium or other metal used in the metallisation step from the gaps 40 between microbeads (see Figures 2a and 2b illustrating the material before and after removal of the metal) over regions corresponding to the matter to be printed when graphical or pictorial or in the form of a pattern or design.

In one example of the invention this was achieved by printing the design or graphical information on to that face of the material (in this case an EN471 compliant retroreflective tape commercially available from Reflec plc of Winsford, UK) at which the microbeads are exposed using a stylus dipped into a 0.8M aqueous solution of potassium hydroxide. After allowing sufficient time for the hydroxide to react with the metal (typically about 30 seconds), the tape was rinsed in water and left to dry. The resulting design (as represented by areas of the tape from which the metal has been removed) was clearly visible both before and after the tape had been applied to a garment using a heated press. This indicates that the metal in the areas between the beads had been selectively removed to expose the plastics/polymeric layer in which the beads are embedded.

Although in the foregoing example an alkali, namely potassium hydroxide, is used to dissolve away the silvery grey aluminium in the areas between the beads, it will be appreciated that other agents (alkaline, acidic or otherwise) may be used to effect the removal of the aluminium or other retroreflectivity-enhancing material, the agent selected
5 being one which does not attack, at least not to any significant extent, the plastics/polymeric layer in which the beads are embedded so that the layer of material then serves to protect the hemispherical coating of metal on each bead from attack thereby preserving the retroreflective properties of the material. The plastics/polymeric substrate in which the beads are embedded may incorporate a dye or pigment determining the colour
10 seen following removal of the metal at the inter-bead gaps.

A suitable coloured, or dye or pigment-containing, alkali or other agent can also be used to effect a change in the visual appearance/colour of the bridging material.

15 The method of the invention may be used to give the effect of printing or it may be used to remove/treat the metal at substantially all of the inter-bead gaps to modify the coloured appearance of the retroreflective material.

Fig 1a

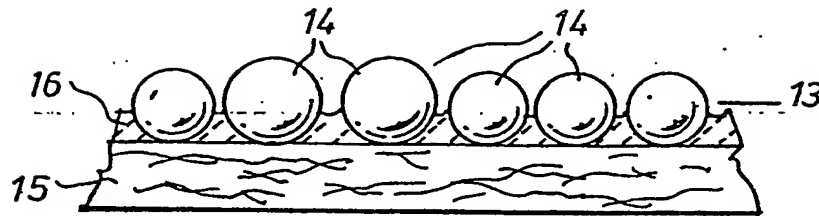


Fig 1b

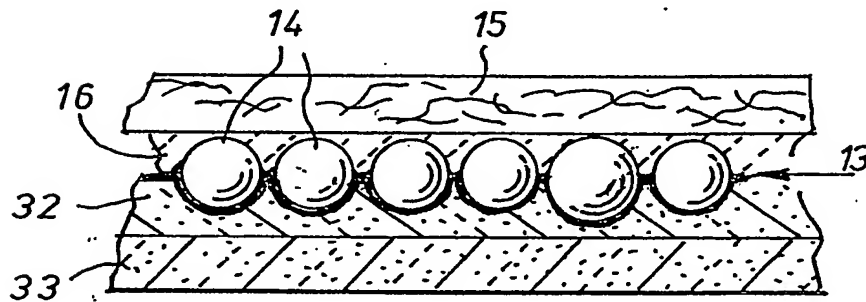


Fig 1c

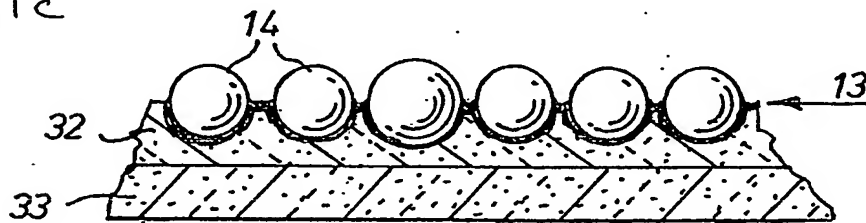


Fig 2a

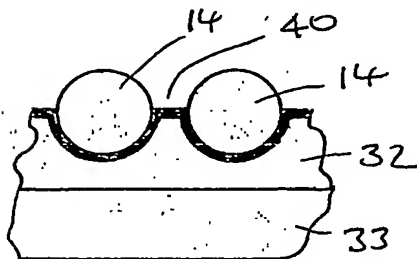


Fig 2b

